

# PATENT COOPERATION TREATY

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>PHJ 99.025W0</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/EP 00/11695</b>	International filing date (day/month/year) <b>21/11/2000</b>	(Earliest) Priority Date (day/month/year) <b>26/11/1999</b>
Applicant  <b>KONINKLIJKE PHILIPS ELECTRONICS N.V.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

### 1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1  
☐ None of the figures.

## Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

The lamp of the invention comprises lead rods (6, 7, 8) and filament structure bodies (13). Each of the filament structure bodies has filaments (13a, 13b, 13c). In the present invention all the filaments (13a, 13b, 13c) are arranged around the outside of the lead rods (6, 7, 8). Since light from each of the filaments (13a, 13b, 13c) reaches outside of the lamp (1) without the light travel being hindered by the three rods (6, 7, 8), the light from the filaments (13a, 13b, 13c) is uniformly radiated. By this construction of the lamp 1, uniformity of a distribution of luminous intensity can be realized.

## INTERNATIONAL SEARCH REPORT

International Application No

/EP 00/11695

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01K1/02

According to International Patent Classification (IPC) or to both national classification and IPC.

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 418 950 A (PHILIPS NV) 27 March 1991 (1991-03-27) abstract; figures 2,3 column 2, line 14 - line 31 column 3, line 57 - column 4, line 4 ---	1,2
A	US 5 268 613 A (CUNNINGHAM DAVID W) 7 December 1993 (1993-12-07) abstract; figure 7 column 1, line 10 - line 17 -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&\* document member of the same patent family

Date of the actual completion of the international search

23 March 2001

Date of mailing of the international search report

30/03/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax (+31-70) 340-3016

Authorized officer

Martín Vicente, M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

EP 00/11695

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0418950	A	27-03-1991	HU 54831 A, B	28-03-1991
			JP 3101049 A	25-04-1991
			US 5079474 A	07-01-1992
US 5268613	A	07-12-1993	CA 2103358 A	03-01-1993
			DE 69231059 D	21-06-2000
			DE 69231059 T	11-01-2001
			EP 0592589 A	20-04-1994
			EP 0969496 A	05-01-2000
			JP 2501772 B	29-05-1996
			JP 6510881 T	01-12-1994
			WO 9301613 A	21-01-1993
			US RE36316 E	28-09-1999

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number  
**WO 01/43164 A1**

- (51) International Patent Classification: **H01K 1/02**
- (21) International Application Number: PCT/EP00/11695
- (22) International Filing Date:  
21 November 2000 (21.11.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
11/335571 26 November 1999 (26.11.1999) JP
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **TAKAHASHI, Toshio** [JP/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **ROLFES, Johannes, G., A.**; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): CN, US.
- (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- Published:  
*With international search report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: LAMP

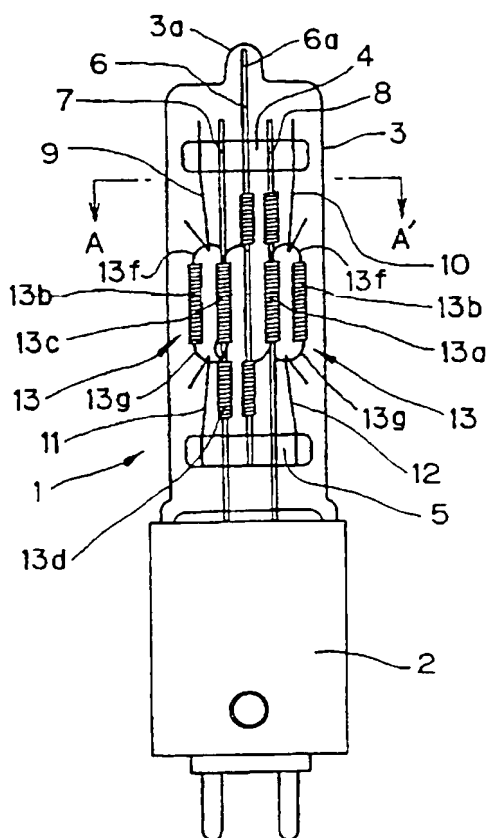

(57) Abstract: The lamp of the invention comprises lead rods (6, 7, 8) and filament structure bodies (13). Each of the filament structure bodies has filaments (13a, 13b, 13c). In the present invention all the filaments (13a, 13b, 13c) are arranged around the outside of the lead rods (6, 7, 8). Since light from each of the filaments (13a, 13b, 13c) reaches outside of the lamp (1) without the light travel being hindered by the three rods (6, 7, 8), the light from the filaments (13a, 13b, 13c) is uniformly radiated. By this construction of the lamp (1), uniformity of a distribution of luminous intensity can be realized.

WO 01/43164 A1

## Lamp

This invention relates to a lamp comprising at least one lead rod and a plurality of filaments.

5           Heretofore, spotlighting at a studio and a stage or the like has been performed by combining a halogen lamp with a reflector in general. Fig. 9 is a view showing a conventional example of a halogen lamp for the studio. This halogen lamp 100 comprises a base 101 and a glass tube 102 is provided on the upper of this base 101. Two pieces of lead rod 105 fixed by two pieces of glass piece 103 and 104 are arranged on the inside of the glass  
10 tube 102. The glass piece 103 fixes the upper end of two pieces of lead rod 105 and another glass piece 104 fixes the central portion of two pieces of lead rod 105. Moreover, a plurality of filaments 106 connected to each other in series is arranged between the glass pieces 103 and 104. These plurality of filaments 106 are supported by a support 108, and both ends 106a of these plurality of filaments 106 connected each other in series are connected with windings  
15 107 wound in the form of a coil. The windings 107 are welded in the condition of being passed through the lead rods 105, thereby electrically connects a plurality of filaments 106 with the lead rod 105. When attaching the reflecting mirror to the halogen lamp 100 having a structure shown in Fig. 9 and using this halogen lamp 10, there has been a problem that the light emitted from the filament 106 is shut off by the lead rod 105, so that lack of uniformity  
20 of luminous intensity distribution are caused.

The object of the invention is to provide a lamp capable of suppressing lack of uniformity of luminous intensity distribution.

25           The present invention is characterized in that the plurality of filaments is arranged around said lead rod. When arranging a plurality of filaments around the lead rod, the light emitted from the filaments is irradiated approximately uniformly toward the surroundings of the lamp without being shut off by the lead rod, whereby lack of uniformity of luminous intensity distribution can be suppressed.

Here, the lamp according to the invention preferably comprises a plurality of filament structure elements, each of the filament structure elements having the plurality of filament, and the lamp comprises a plurality of the lead rod, wherein one of the plurality of the lead rod connects each of the plurality of filament structure elements. Vibration resistance  
5 of a lamp can be improved by connecting each of a plurality of the filament structure elements to the one lead rod.

Embodiments according to the invention will be described below, in which  
10 Fig. 1 is a view showing a lamp of a first embodiment according to this invention;

Fig. 2 is a sectional view of Fig. 1, the Fig. 1 being viewed from a direction of line A-A';

Fig. 3 is a front elevation showing a stem;

15 Fig. 4 is a side elevation of the stem shown in Fig. 3, the stem being viewed from the right side;

Fig. 5 is a view showing a filament structure;

Fig. 6 is a front elevation showing a condition which two pieces of filament structure elements 13 are fixed to the stem;

20 Fig. 7 is a side elevation of the stem, the stem being viewed from the side of the filament structure element 13 fixed to the side of the lead rod 8;

Fig. 8 is a view showing a lamp of a second embodiment according to this invention;

25 Fig. 9 is a view showing a conventional example of a halogen lamp for the studio.

Fig. 1 is a view showing a lamp of a first embodiment according to this invention, and Fig. 2 is a sectional view of Fig. 1 being viewed from a direction of line A-A'.  
30 This lamp 1 comprises the base 2 and the glass tube 3 is provided on the upper of this base 2. The base 2 is attached to one end of the glass tube 3 and a small-diameter tube 3a is formed at a center of the other end of this glass tube 3. Moreover, a stem (refer to Fig. 3 and Fig. 4 which will be described below) constituted by parts such as three pieces of lead rod 6, 7 and 8 is provided, and furthermore, two pieces of filament structure elements 13 (refer to Fig. 5)

are provided on the inside of the glass tube 3 as shown in Fig. 2. Each of two pieces of filament structure elements 13 has three pieces of filament 13a, 13b and 13c. Since a piece of filament structure element 13 has three pieces of filament 13a, 13b and 13c, six pieces of filament 13a, 13b and 13c in total are arranged within the glass tube 3. Therefore, this lamp 1 is the lamp having six sections of filament structure. These six pieces of filament 13a, 13b and 13c are arranged in a manner to surround three pieces of lead rod 6, 7 and 8. Moreover, in Fig. 1, two filaments of three filaments provided for each of filament structure elements 13 are illustrated, and one remaining filament is not shown since the remaining filament hides behind the back of the lead rod 7 and 8.

Fig. 3 is a front view of a stem, and Fig. 4 is a side view of the stem shown in Fig. 3, the stem being viewed from the right side. The stem is constituted by two pieces of the glass pieces 4 and 5, three pieces of the lead rod 6, 7 and 8, and four pieces of support 9, 10, 11 and 12. Three pieces of the lead rod 6, 7 and 8 are fixed by two pieces of glass piece 4 and 5. The centered lead rod 6 of these three pieces of lead rod 6, 7 and 8 is fixed so as to project to the upper slightly than other lead rods 7 and 8. Moreover, two supports 9 and 10 are attached to the glass piece 4 and two supports 11 and 12 are attached to the other glass piece 5. The supports 9 and 11 (which are attached to the left of the glass pieces 4 and 5) of these four pieces of support 9, 10, 11 and 12 are protruded to the opposite side each other with respect to the lead rod 8 as shown in Fig. 4. Moreover, the supports 10 and 12 attached to the right of the glass pieces 4 and 5 are also protruded to the opposite side each other with respect to the lead rod 8 as shown in Fig. 4. Moreover, two pieces of the lead rod 7 and 8 of three pieces of the lead rod 6, 7 and 8 are connected with the base 2, and the remaining lead rod 6 is for connecting two pieces of filament structure element 13 each other. Two pieces of filament structure elements 13 are attached to the stem composed as described above.

Fig. 5 is a view showing a filament structure element. As shown in Fig. 5, the filament structure element 13 comprises three pieces of filament 13a, 13b, and 13c and two windings 13d and 13e wound in the form of a coil. Three filaments 13a, 13b and 13c are connected each other in series by connecting wires 13f and 13g. Windings 13d and 13e are connected to the filaments 13a and 13c by a connecting wire 13h. This filament structure element 13 is formed by coiling a piece of tungsten single wire such that three pieces of filament 13a, 13b and 13c and two windings 13d and 13e are formed. Two pieces of filament structure elements 13 having such structure are fixed between the glass pieces 4 and 5. One filament structure element 13 of two filament structure elements 13 is fixed to the side of the lead rod 8 with respect to the centered lead rod 6 (refer to Fig. 2), and the other filament 13 is



fixed to the side of the lead rod 7. How to fix two pieces of filament structure elements 13 between the glass pieces 4 and 5 will be described below.

Fig. 6 is a front elevation showing a condition which two pieces of filament structure elements 13 are fixed to the stem. Fig. 7 is a side elevation of this stem, the stem being viewed from the side of the filament structure element 13 fixed to the side of the lead rod 8. In the filament structure element 13 fixed to the side of the lead rod 8, the bottom side winding 13d of the windings 13d and 13e is welded in the condition of being passed through the centered lead rod 6 of three pieces of lead rod 6, 7 and 8, and the upper side winding 13e is welded in the condition of being passed through the right side lead rod 8. Furthermore, with respect to the connecting wires 13f and 13g connecting three filaments 13a, 13b and 13c in series, the one connecting wires 13f connecting the filaments 13a and 13b is hooked to the support 10 (refer to Fig. 4) attached to the glass piece 4, and the other connecting wire 13g is hooked to the support 12 (refer to Fig. 4) attached to the glass piece 5.

As shown in Fig 7, these support 10 and 12 are protruded to the opposite side each other with respect to the lead rod 8. Therefore, when each of the connecting wires 13f and 13g connecting three filaments 13a, 13b and 13c is hooked to each of the support 10 and 12 as mentioned above, these three filaments 13a, 13b and 13c are attached in the condition that the filaments 13a and 13c are arranged on both sides of the filaments 13b. At this point of time, as shown in Fig. 2, these three filaments 13a, 13b and 13c are arranged so as to surround the lead rod 8 from a direction of 180 degree. On the one hand, in the filament structure element 13 fixed to the side of the lead rod 7, the upper side winding 13e of the windings 13d and 13e is welded in the condition of being passed through the centered lead rod 6 of three pieces of lead rod 6, 7 and 8, and the bottom side winding 13d is welded in the condition of being passed through the left side lead rod 7. Furthermore, with respect to the connecting wires 13f and 13g, the one connecting wires 13f connecting the filaments 13a and 13b is hooked to the support 9 (refer to Fig. 4) attached to the glass piece 4, and the other connecting wire 13g is hooked to the support 11 (refer to Fig. 4) attached to the glass piece 5. As shown in Fig 7, these support 9 and 11 are protruded to the opposite side each other with respect to the lead rod 6. Therefore, when each of the connecting wires 13f and 13g connecting three filaments 13a, 13b and 13c is hooked to each of the support 9 and 11 as mentioned above, these three filaments 13a, 13b and 13c are attached so as to surround the lead rod 7 from a direction of 180 degree in the condition that the filaments 13a and 13c are arranged on both sides of the filaments 13b, as shown in Fig. 2. Therefore, as shown in Fig. 2, the filaments 13a, 13b and 13c provided for each of two filament structure elements 13 are

arranged so as to surround three pieces of lead rod from a direction of 360 degrees.

Moreover, two pieces of filament structure elements 13 are connected each other in series by the lead rod 6. In the lamp constituted as described above, the filaments 13a, 13b and 13c are arranged outside the lead rod 6, 7 and 8, and no other member exists between the filaments

13a, 13b and 13c and the glass tube 3. Therefore, the light emitted from the filaments 13a, 13b and 13c is irradiated uniformly without being shut off by other members, whereby lack of uniformity of luminous intensity distribution can be suppressed. Moreover, as shown in Fig. 1, the stem provided with the filament structure element 13 is arranged in the glass tube 3 in the condition that a tip portion 6a of the lead rod 6 is inserted into the small-diameter

tube 3a. In the case that the small-diameter tube 3a is formed on the glass tube 3 in advance as described above, this small-diameter tube 3a serves as a mark for positioning the tip portion 6a of the lead rod 6 when arranging the stem in the glass tube 3, whereby positioning of various parts such as the filament can be performed accurately. Moreover, two pieces of the filament structure element 13 having three pieces of filament 13a, 13b and 13c are

provided in order to form the lamp of the filament structure having six sections in this embodiment, and these filament structure elements 13 are connected by the lead rod 6. As described above, when separate filament structure elements 13 are connected by the lead rod 6 to form the lamp of the filament structure having six sections, vibration resistance of a lamp can be improved as compared with the lamp of the filament structure having six sections constituted by providing a piece of filament structure element with six filaments.

Fig. 8 is a view showing a lamp of a second embodiment according to this invention. Moreover, In the following description of the lamp of the second embodiment shown in Fig.8, those components identical with those of the lamp of first embodiment shown in FIG. 1 are indicated by the same reference numerals, respectively, and only those points different from the lamp of the first embodiment shown in FIG. 1 will be described. The difference between the lamp in the second embodiment shown in Fig. 8 and the lamp in the first embodiment shown in Fig. 1 is that all three pieces of lead rod 6, 7 and 8 are rodlike in the lamp shown in Fig. 1, whereas a centered lead rod 61 of three pieces of lead rod 7, 8 and 61 has a form of U-shape in the lamp shown in Fig. 8. This lead rod 61 is arranged such that a bent portion 61a is inserted into the small-diameter tube 3a. As described above, this invention should not be mentioned for a form of a lead rod, and the filaments are arranged outside the lead rods, whereby the light emitted from the filaments is irradiated uniformly, and lack of uniformity of luminous intensity distribution can be suppressed. Moreover, although the lamp having six filaments has been described in the first embodiment and the

second embodiment, the number of filament should not be limited to six pieces in this invention. With respect to lamp which needs a plurality of filaments (for example, four pieces), what the plurality of filaments are arranged around the lead rod can suppress lack of uniformity of luminous intensity distribution. Moreover, although the filaments 13a, 13b and 5 13c are single windings in the first embodiment and the second embodiment, these may be non-windings, or may be duplex windings.

## CLAIMS:

1. A lamp (1) comprising at least one lead rod (6, 7, 8) and a plurality of filaments (13a, 13b, 13c), wherein the plurality of filaments is arranged around the lead rod.
2. A lamp (1) as claimed in claim 1, wherein the lamp comprises a plurality of  
5 filament structure elements (13), each of the filament structure elements having the plurality of filament (13a, 13b, 13c), and the lamp comprises a plurality of the lead rod (6, 7, 8), one of the plurality of the lead rod connects each of the plurality of filament structure elements.



2/6

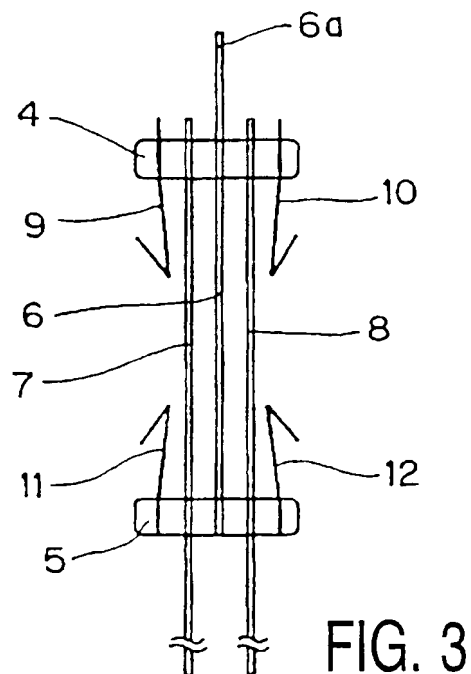


FIG. 3

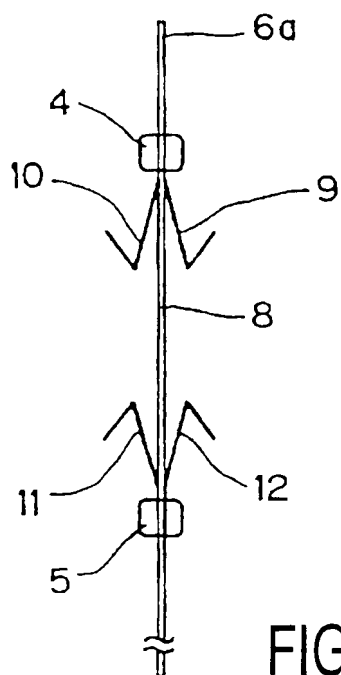


FIG. 4

3/6

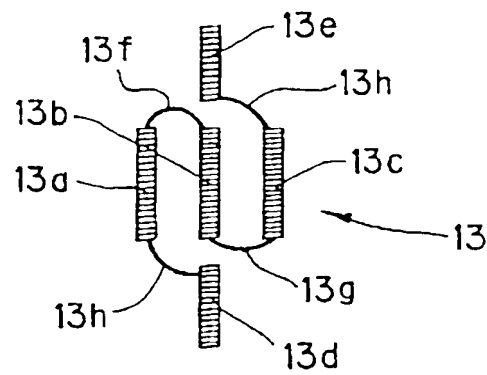


FIG. 5

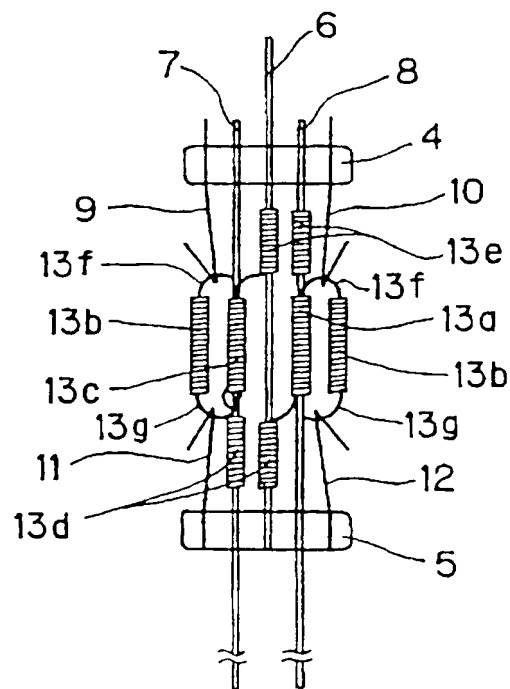


FIG. 6

4/6

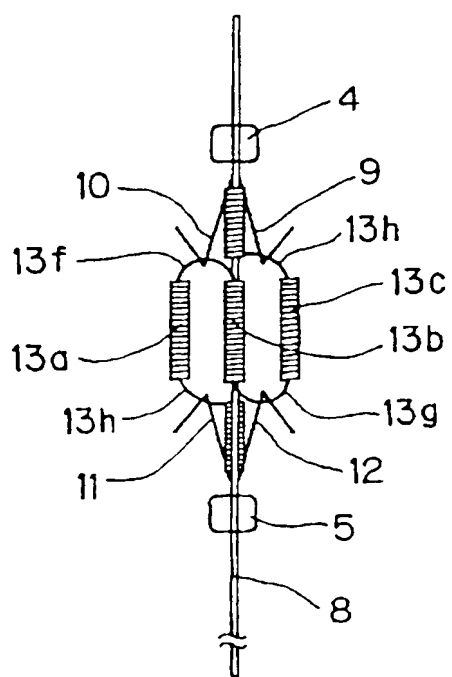


FIG. 7



5/6

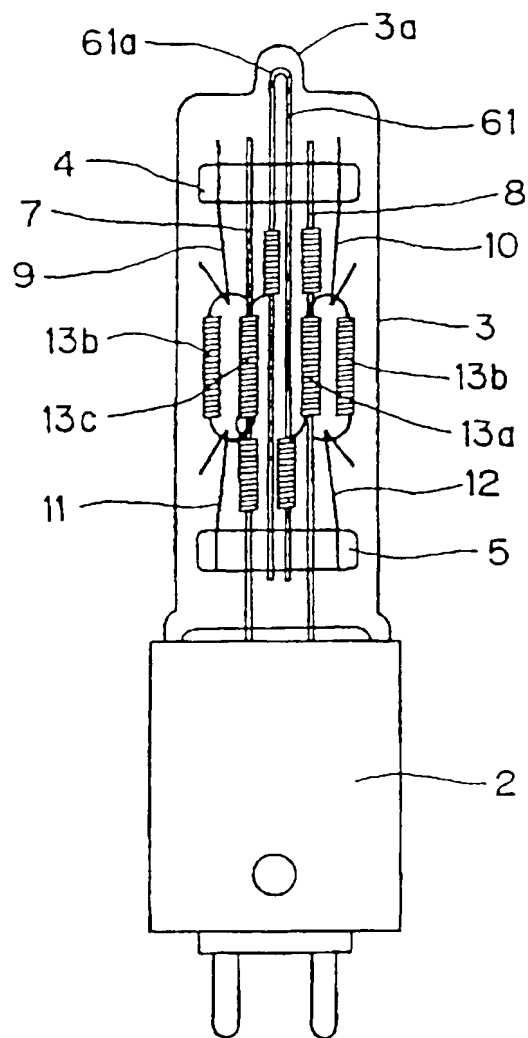


FIG. 8

6/6

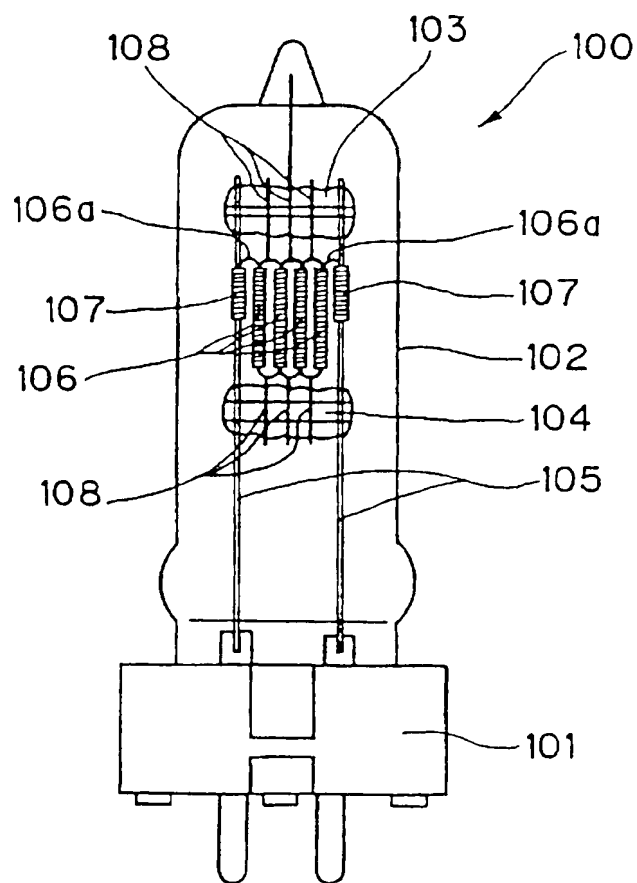


FIG. 9